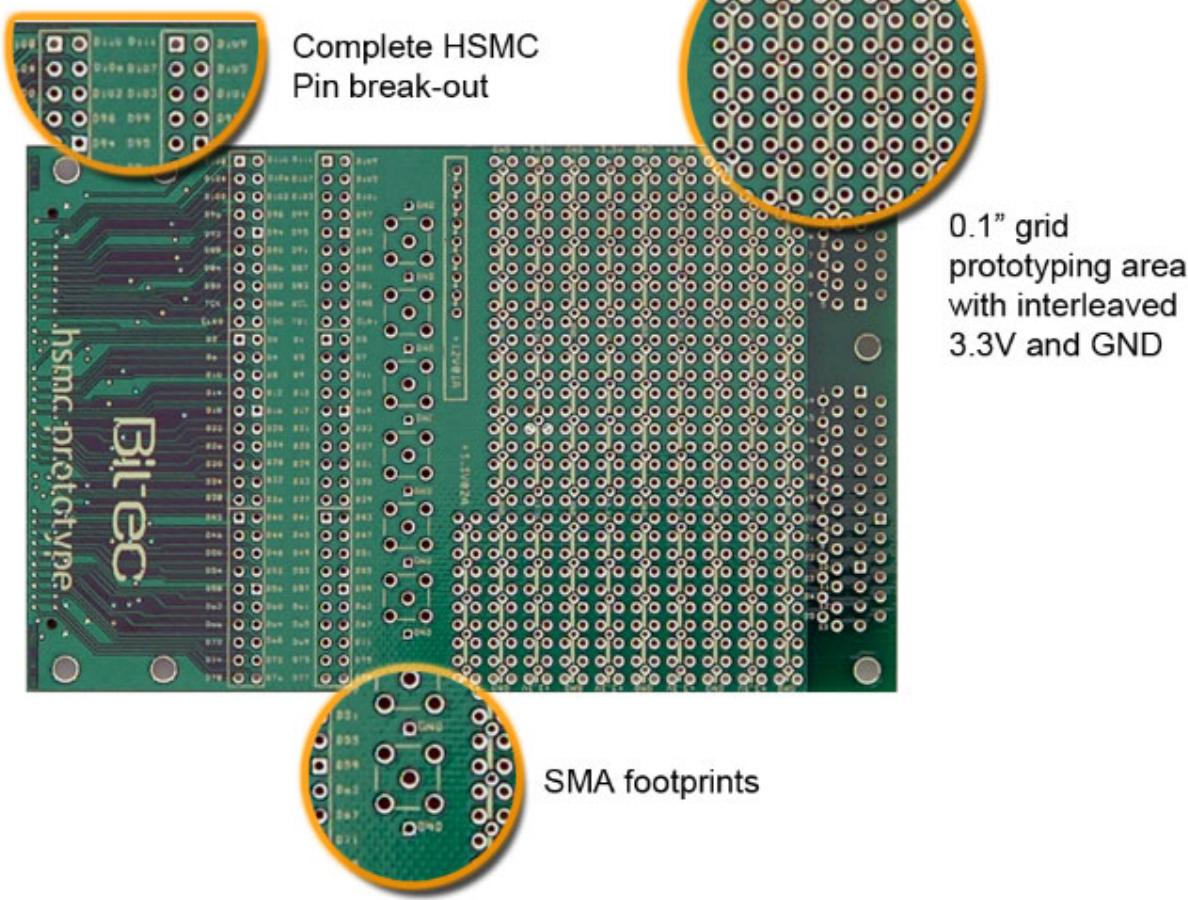


Product Brief:

HSMC Prototyping board

型番 HSMC-Proto 立野電腦 標準在庫品


ALTERA®**Features**

- High quality, 4-layer, FR4 PCB with plated thru holes.
- Convenient access points to every pin on the HSMC connector.
- A white silkscreen clearly identifying all access points and voltages.
- Solder mask on both sides of the board.
- Plugs into ALTERA Stratix III and Cyclone III development kits using the HSMC interface standard.
- A dense grid of GROUND and +3.3V distributed throughout the board.
- +3.3V and GND planes throughout the board for added noise immunity.
- Access to fused +12V and +3.3V supplies.
- Break-out headers for the HSMC connector including the complete 80-available signals.



The Bitec HSMC prototype board provides an elegant and economical solution for prototyping circuits and testing them together with the latest ALTERA FPGA development kits.

The board provides access to the complete set of HSMC signals via a footprint of standard 0.1" pitch headers. The HSMC power pins are accessed via fuses for added security. The main prototype matrix comprises a 0.1" grid interleaved with +3.3V and GND access points. Footprints for commonly used 25-way and 9-way d-type connectors are included on the board.

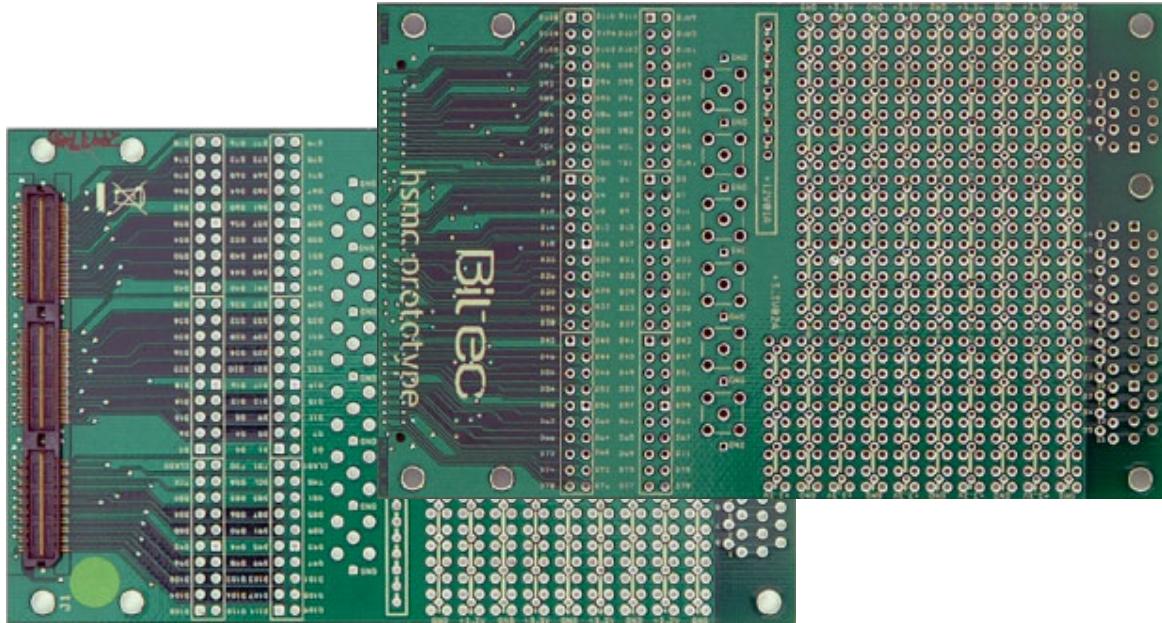

For more information www.bitec-dsp.com

Altera, MegaCore and the Altera and Cyclone logos are Reg. U.S. Pat. & Tm. Off. and marks of Altera in and outside the US



Pin No	Function	Function	Pin No	Description
1	D110	D111	2	CMOS
3	D108	D109	4	CMOS
5	D106	D107	6	CMOS
7	D104	D105	8	CMOS
9	D102	D103	10	CMOS
11	D100	D101	12	CMOS
13	D98	D99	14	CMOS
15	D96	D97	16	CMOS
17	D94	D95	18	CMOS
19	D92	D93	20	CMOS
21	D90	D91	22	CMOS
23	D88	D89	24	CMOS
25	D86	D87	26	CMOS
27	D84	D85	28	CMOS
29	D82	D83	30	CMOS
31	D80	D81	32	CMOS
33	SDA	SCL	34	SMBUS/CMOS
35	JTAG_TCK	JTAG_TMS	36	JTAG/CMOS
37	JTAG_TDO	JTAG_TDI	38	JTAG/CMOS
39	CLKOUT0	CLKIN0	40	CMOS/CLK
41	D0	D1	42	CMOS
43	D2	D3	44	CMOS
47	D4	D5	48	CMOS
49	D6	D7	50	CMOS
53	D8	D9	54	CMOS
55	D10	D11	56	CMOS
59	D12	D13	60	CMOS
61	D14	D15	62	CMOS
65	D16	D17	66	CMOS
67	D18	D19	68	CMOS
71	D20	D21	72	CMOS
73	D22	D23	74	CMOS
77	D24	D25	78	CMOS
79	D26	D27	80	CMOS
83	D28	D29	84	CMOS
85	D30	D31	86	CMOS
89	D32	D33	90	CMOS
91	D34	D35	92	CMOS
95	D36	D37	96	LVDS CLKp/CMOS
97	D38	D39	98	LVDS CLKn/CMOS
101	D40	D41	102	CMOS
103	D42	D43	104	CMOS
107	D44	D45	108	CMOS
109	D46	D47	110	CMOS
113	D48	D49	114	CMOS
115	D50	D51	116	CMOS
119	D52	D53	120	CMOS
121	D54	D55	122	CMOS
125	D56	D57	126	CMOS
127	D58	D59	128	CMOS
131	D60	D61	132	CMOS
133	D62	D63	134	CMOS
137	D64	D65	138	CMOS
139	D66	D67	140	CMOS
143	D68	D69	144	CMOS
145	D70	D71	146	CMOS
149	D72	D73	150	CMOS
151	D74	D75	152	CMOS
155	D76	D77	156	LVDS CLKp/CMOS
157	D78	D79	158	LVDS CLKn/CMOS

Generic single-ended HSMC pin function
