



Datasheet Komodo III Quad CoF

Komodo III Quad CoF Quad CoF Frame Grabber

Kaya Visionは CoaXPress CoF v2.1に対応したフレームグラバ、カメラシミュレータ、IP、カメラすべてを開発製造しています。お問い合わせは立野電脳(株) sales@dsp-tdi.com

KAYA Vision is a global leader in commercial, industrial and rugged cameras and imaging system solutions, providing high-performance products for over 15 years. Founded in 2010 by industry experts, KAYA Vision designs, manufactures and supports both COTS and custom products for high-performance imaging needs.

KAYA Vision Frame Grabbers offer advanced features such as real-time image processing, DMA engine optimization and flexible frame buffer configurations, providing unparalleled flexibility for developers and integrators. Fully compatible with leading software platforms, they also include an intuitive, easy-to-use SDK to simplify integration and accelerate deployment across diverse industries, including industrial automation, medical imaging, and aerospace. Whether designing a cutting-edge vision system or enhancing existing workflows, KAYA Vision Frame Grabbers deliver the performance, scalability, and reliability required for the most demanding imaging tasks.

Key Features:

- Quad CoaXPress-over-Fiber (CoF) links support
- Up to 4 Multi-streams
- PCI Express card
- PCIe 3.0 x8 bus
- 4 GB DDR4 frame buffer
- Camera controls and triggers
- Link Status LED indication
- Flexible GPIO interface:
 - 4 TTL configurable I/Os
 - 4 LVTTTL configurable I/Os
 - 2 LVDS inputs
 - 2 LVDS outputs
 - 4 opto-isolated inputs
 - 4 opto-isolated outputs
 - 4 quadrature rotary encoders
 - Integrated strobe controller
 - 4 timers
- CoaXPress-over-Fiber (CoF) v2.1 compliant
- Multiple camera synchronization
- Multiple Frame Grabbers synchronization
- SFP+ connectors for CoaXPress-over-Fiber (CoF) links
- GUI Interface
- Supporting Windows, Linux OS and Nvidia Jetpack
- API for custom application development
- Plug-in modules for Matlab, HALCON, Cognex and Labview
- Gen<i>Cam compliant
- GenTL support
- Data rates up to 10.3125 Gbps per link
- Transfer rates of up to 6,695 MB/s
- 0°C to +50°C operating environment temperatures

TECHNICAL DATA

| Mechanical | |
|----------------|--|
| Form factor | PCI Express card |
| Format | Standard profile, half-length, 8-lane PCI Express card |
| Cooling method | Passive, requires airflow |
| Mounting | For insertion in a standard height, 8-lane or higher, PCI Express card slot |
| Connectors | <ul style="list-style-type: none">• Ports 1 through 4 via x4 SFP+ connectors for CoaXPress-over-Fiber (CoF) v2.1 interface• x1 I/O connector 26-pin 2-row 0.1" pitch pin header with shrouding on board |
| Dimensions | 167.65 mm x 111.16 mm (6.6" x 4.4") |
| Weight | 250 g (8.8 oz) |

| Host Bus | |
|--|---|
| Standard | PCI Express 3.0 |
| Link width | <ul style="list-style-type: none">• 8 lanes• 1, 2 or 4 lanes with reduced performance |
| Link speed | <ul style="list-style-type: none">• 8.0 GT/s (PCIe 3.0)• 5.0 GT/s (PCIe 2.0) with reduced performance |
| Maximum payload size | 2,048 bytes |
| DMA | <ul style="list-style-type: none">• 64-bit addressing support• Scatter gather support• Physical address support (GPU transfers) |
| Peak delivery bandwidth | 7,877 MB/s |
| Effective (sustained) delivery bandwidth | 6,695 MB/s (Host PC dependent) |
| Power consumption | 16.8 W, excluding camera and I/O power output |

| Camera / Video Inputs | |
|---|--|
| Interface standard(s) | CoaXPress-over-Fiber (CoF) v2.1 |
| Status LEDs | <ul style="list-style-type: none">• 1 bicolor status LED per camera connector• 4 System status LEDs |
| Number of cameras | Up to 4 |
| Number of links per single camera | Up to 4 |
| Number of streams per single camera | Up to 4 |
| Total number of streams per frame grabber | Up to 4 |
| Synchronization between cameras | Yes |
| Line-scan cameras supported | Yes |

| | |
|--|--|
| Maximum aggregated camera data transfer rate | 41.3 Gbit/s |
| Supported down-connection speeds | <ul style="list-style-type: none"> • 10.3125 Gbit/s |
| Supported up-connection speeds | <ul style="list-style-type: none"> • 10.3125 Gbit/s |
| Maximum stream packet size | 8,192 bytes |
| Maximum line width | 16384 pixels |
| Maximum image size | 2 Megabytes |
| Power over protocol | - |
| Camera types | <p>Area-scan cameras:</p> <ul style="list-style-type: none"> • Gray-scale and color (RGB and Bayer CFA) • Single-tap (1X-1Y) progressive-scan • Single-tap (1X-1Y) interlaced <p>Line-scan cameras:</p> <ul style="list-style-type: none"> • Gray-scale and color RGB |
| Camera pixel formats supported | <p>Raw, Monochrome, Bayer, RGB, YUV, YCbCr and RGBA (PFNC names):</p> <ul style="list-style-type: none"> • Raw • Mono8, Mono10, Mono12, Mono14, Mono16 • BayerXX8, BayerXX10, BayerXX12, BayerXX14, BayerXX16 where XX = GR, RG, GB, or BG • RGB8, RGB10, RGB12, RGB14, RGB16 • RGBA8, RGBA10, RGBA12, RGBA14, RGBA16 • YUV411_8, YUV411_10, YUV411_12, YUV411_14, YUV411_16 • YUV422_8, YUV422_10, YUV422_12, YUV422_14, YUV422_16 • YUV444_8, YUV444_10, YUV444_12, YUV444_14, YUV444_16 • YCbCr601_411_8, YCbCr601_411_10, YCbCr601_411_12, YCbCr601_411_14, YCbCr601_411_16 • YCbCr601_422_8, YCbCr601_422_10, YCbCr601_422_12, YCbCr601_422_14, YCbCr601_422_16 • YCbCr601_444_8, YCbCr601_444_10, YCbCr601_444_12, YCbCr601_444_14, YCbCr601_444_16 |

| General Purpose Inputs and Outputs | |
|------------------------------------|---|
| Number of lines | <p>20 I/O lines:</p> <ul style="list-style-type: none"> • 2 differential inputs • 2 differential outputs • 4 singled-ended TTL inputs/outputs • 4 singled-ended LVTTTL inputs/outputs • 4 opto-isolated inputs] • 4 opto-isolated outputs |
| Usage | <ul style="list-style-type: none"> • Any System I/O input lines can be connected to any I/O output line • Any I/O input line can be used to decode A/B and Z signals of a motion encoder • Any I/O input line can generate any trigger event • Any I/O input line can trigger a timer |
| Electrical specifications | <ul style="list-style-type: none"> • Differential lines - LVDS compatible • TTL lines: 5 V TTL compliant • LVTTTL lines: 3.3 V LVTTTL compliant • Isolated lines: opto-isolated lines with voltage range up to 30 V |
| Filter control | <ul style="list-style-type: none"> • Glitch removal filter for Encoders and Triggers • Configurable filter time between 0 μs and 34 ms • Filter time resolution of 8 ns |

| | |
|------------------|--|
| Polarity control | Yes |
| Encoders | <ul style="list-style-type: none"> • 4 quadrature encoders with A/B and Z inputs • 32-bit position counter • Forward and backward counting • Position trigger support • Noise filtering |
| Timers | <ul style="list-style-type: none"> • 4 general purpose timers • Configurable delay and duration • 32-bit accumulator |
| Event reporting | <ul style="list-style-type: none"> • 64-bit system timestamp event reporting • Each I/O line can generate event on configurable edge • Each Timer can generate event • Each encoder can generate event |

| Frame Grabber Synchronization | |
|-------------------------------|--|
| Synchronization | Precise area and line-scan cameras synchronization across different frame grabbers |

| Area-Scan Camera Control | |
|--------------------------|---|
| Trigger | <ul style="list-style-type: none"> • Precise control of asynchronous reset cameras, with exposure control. • Support of camera exposure/readout overlap • Support of triggering from encoder or timer • Support of external hardware trigger, with optional delay, filtering and trigger decimation |
| Strobe | Accurate control of the strobe position for strobe light sources. Support of early and late strobe pulses |

| Line-Scan Camera Control | |
|--------------------------|---|
| Scan/page trigger | <ul style="list-style-type: none"> • Precise control of start-of-scan and end-of-scan triggers • Support of external hardware trigger, with optional delay and filtering • Support of triggering from encoder • Support of infinite acquisition without missing lines |
| Line trigger | Support for quadrature motion encoders, with programmable filters, selection of acquisition direction and backward motion compensation |
| Line strobe | Accurate control of the strobe position for strobe light sources |

| On-Board Processing | |
|----------------------|---|
| On-board memory | 4 GB DDR4 |
| Bayer De-Mosaic | <ul style="list-style-type: none"> • Full 16-bit resolution • Bilinear 3x3 |
| Color transformation | <ul style="list-style-type: none"> • Full 16-bit resolution 18-bit coefficients table • Color space conversion • Gain and Offset |
| Decimation | Line skip |
| Additional features | Unpacking of 10/12/14-bit to 16-bit LSB aligned |
| Frame timestamp | 64-bit with 8 ns precision |

| | |
|------------------------------|--|
| Data stream statistics | Measurement of: <ul style="list-style-type: none"> • Frame rate • CRC Errors • Received/Dropped frames • Received/Dropped packets • Test packets |
| Event signaling and counting | The application software can be notified of the occurrence of various events: <ul style="list-style-type: none"> • Newly acquired buffers • I/O events • Timer events • Encoder events |

| Software | |
|--------------------------|---|
| Host PC operating system | <ul style="list-style-type: none"> • Microsoft Windows 10 64-bit version • Microsoft Windows 11 64-bit version • Signed and certified kernel driver supporting Windows 10 and 11 • Source code Linux kernel driver (Automatically compiled during installation) • Tested for Ubuntu 18.04, 20.04 and 22.04 versions • Nvidia Xavier AGX (Jetpack 5.1.1 and 4.6.1) • Nvidia Orin AGX (Jetpack 5.1.1) |
| Gen<i>Cam | <ul style="list-style-type: none"> • Support of Gen<i>Cam 3.2 • Full camera and Frame Grabber parameters configuration |
| Buffer management | <ul style="list-style-type: none"> • Circular buffer support • Accumulation of several frames/lines to single buffer to reduce CPU load • Flexible buffer queuing • DMA Buffer filling directly to system memory |
| GUI | <ul style="list-style-type: none"> • Supported for Windows and Linux OS • Multi camera display and configuration • Image/video recording and playback |
| Debugging capabilities | <ul style="list-style-type: none"> • Event logging • Statistics counters |
| APIs | <ul style="list-style-type: none"> • Gen<i>Cam, GenTL producer libraries, ANSI C, Python and NET bindings • x86_64 dynamic library designed to be used with ISO-compliant C runtime • Allows for development of x86_64 applications • Plug-in modules for Matlab, HALCON, Cognex and Labview • Export straightforward, unified and easy-to-use API across all Grabber types • Include practical examples based on API functions, for supported language wrappers • Documentation include sample snippets for API usage |


| Environmental Conditions | |
|-----------------------------------|--------------------------------------|
| Operating ambient air temperature | 0 °C to +50 °C (32 °F to +122 °F) |
| Operating ambient air humidity | 10% to 90% RH non-condensing |
| Storage ambient air temperature | -20 °C to +70 °C (-4 °F to +158 °F) |

| | |
|------------------------------|------------------------------|
| Storage ambient air humidity | 10% to 90% RH non-condensing |
| Shock/Vibration | - |

| Certifications | |
|---------------------------------|--|
| Electromagnetic - EMC standards | <ul style="list-style-type: none"> • The European Council EMC Directive 2004/108/EC • The United States FCC rule 47 CFR 15 |
| EMC - Emission | <ul style="list-style-type: none"> • EN 55022:2010 Class B • FCC 47 Part 15 Class B |
| EMC - Immunity | <ul style="list-style-type: none"> • EN 55024:2010 Class B • EN 61000-4-3 • EN 61000-4-4 • EN 61000-4-6 |
| Flammability | PCB compliant with UL 94 V-0 |
| RoHS | Compliant with the European Union Directive 2011/65/EU (RoHS2) |
| REACH | Compliant with the European Union Regulation No 1907/2006 |
| WEEE | Must be disposed of separately from normal household waste and must be recycled according to local regulations |

| Ordering Information | |
|----------------------|--|
| Part Number | KY-FGF-III-COF |
| Optional accessories | <ul style="list-style-type: none"> • SFP+ modules • Fiber cables • GPIO expansion bracket |
| Accessories Included | - |

HARDWARE BLOCK DIAGRAM

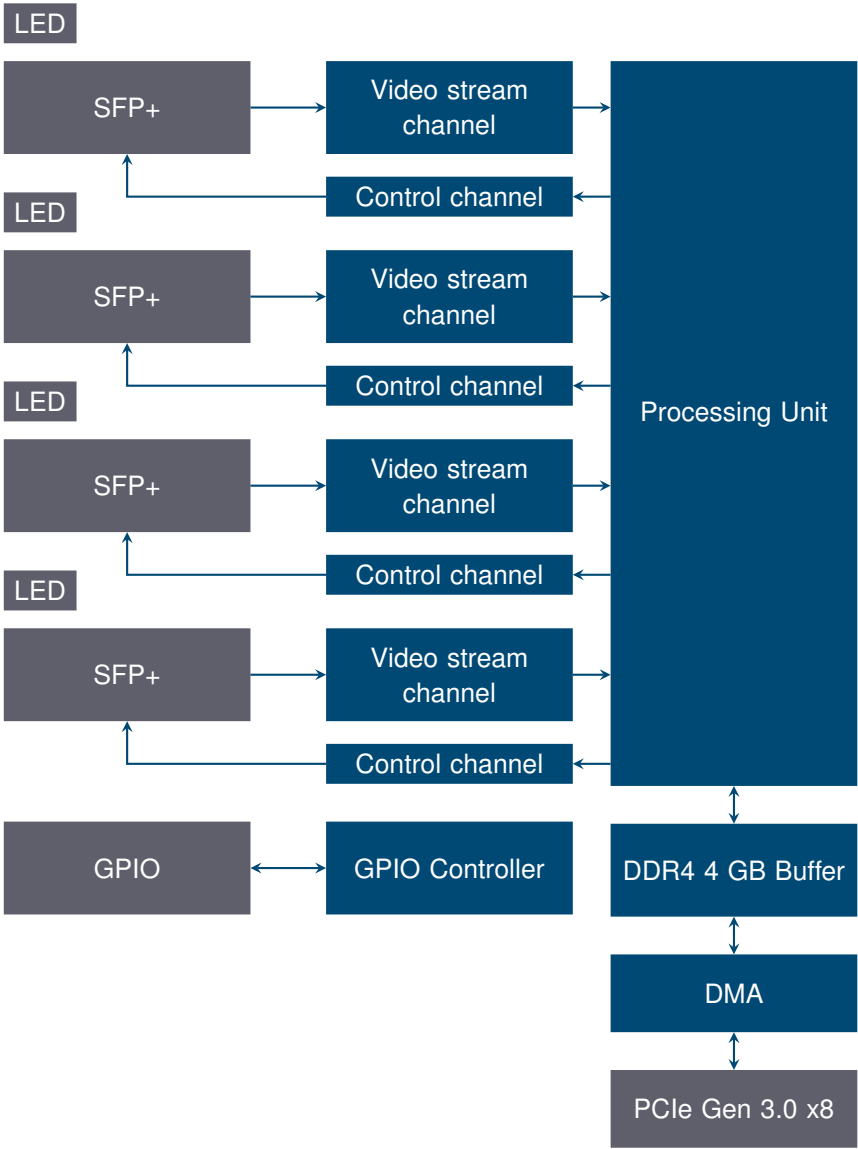


立野電腦

EXT營業部

E-mail : sales@dsp-tdi.com

〒198-0063 東京都青梅市梅郷5-955 TEL.0428-77-7000

URL <https://www.dsp-tdi.com/>

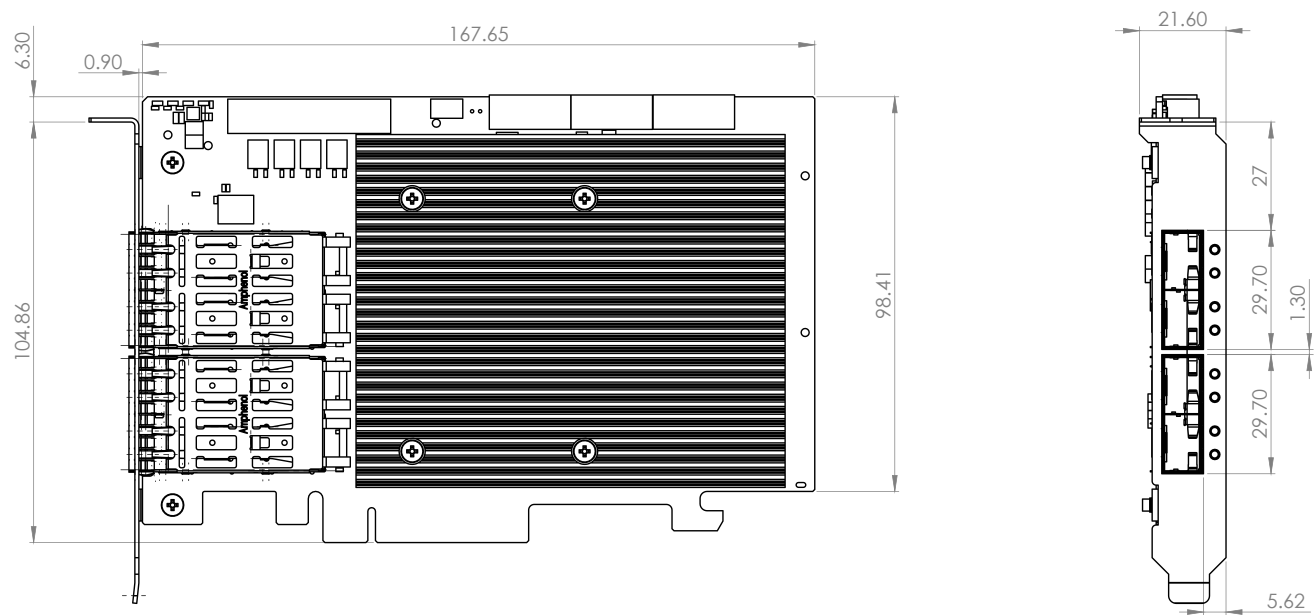

Dimensions are in millimeters.

COMPATIBILITY

KAYA Vision develops and maintains compatibility and interfaces for the most common and advanced vision image processing libraries and applications. We ensure seamless integration with major platforms to provide users with a flexible and convenient development environment, minimize integration effort, and accelerate time to deployment.

Supported vision standards:



Supported vision libraries:



Supported operating systems:



Please check our website for an up-to-date list of other supported libraries and software package.

お問い合わせは立野電脳（株） sales@dsp-tdi.com

 EXT営業部
E-mail : sales@dsp-tdi.com
〒198-0063 東京都青梅市梅郷5-955 TEL.0428-77-7000

URL <https://www.dsp-tdi.com/>

内容は予告なく変更される場合があります。



Have questions about pricing, availability, documentation, or custom options?
We're always ready to assist and provide expert guidance.
Sales Inquiries: info@kaya.vision
Technical Support: support@kaya.vision
www.kaya.vision

KAYA Vision, Inc.
20283 State Road 7
Suite 350
Boca Raton, FL 33498
USA
+1 561 698-2899